25X1A Approved For Release 2001/08/02 CIA TO THE TOTAL TO THE PROPERTY OF THE PROPER CENTRAL INTELLIGENCE AGENCY INFORMATION REPORT

COUNTRY : USSR

State Institute for Applied Chemistry SUBJECT :

(GIPKh Institute), Leningrad

NO. OF PAGES

DATE DISTR. 22 MAY 57

25X1A PLACE ACQUIRED:

25X1C

NO. OF ENCLS. (LISTED BELOW)

DATE

ACQUIRED BY SOURCE

SUPPLEMENT TO REPORT NO.

May 1951 DATE OF INFORMATION :

VELOCITIES INFORMATION AFFECTING THE NATIONAL DETE WE UNITED STATES, WITHIN THE MEANING OF TITE. IS, SECTIONS 794, OF THE U.S. CODE, AS AMENDED. ITS TRANSMISSION OR RE ON OF ITS CONTEXTS TO OR RECEIT D'AY A UMADITMOSITED PESSON INITED BY LAW. THE REPRODUCTION OF THIS FORM IS PROHIBITE

25X1X

25X1X SOURCE :



and further This is the third report exploitation is being conducted. Requests for further information can be accepted.

25X1A

25X1A

## GIPKh Institute

the Chemistry Group was assigned to work at the State Institute for Applied Chemistry (GIPKh) in Leningrad, USSE 1A This Institute was attached to the Ministry of Chemical Industries and received the directives for its work directly from Moscow.

The German personnel continued to live in Sestroretsk

SECURITY INFORMATION STATE X EN ONI DISTRIBUTION ATIC

IORM NO. 51-4F

and the first of the con-

(20)

and commuted daily to Leningrad.

- 2. The GIPKh Institute is located on an island, not far\_from the Peter and Paul Fortress /see Enclosure (A), point 1 /; the address is Vadni-Ostrov No 2. The Institute covered an area approximately 600 x 300 meters and, on the side away from the 25X1A Neva River, was surrounded by a high barbed wire fence /see Enclosure (B) -- Layout of the GIPKh Institute The buildings had previously housed a state brandy factory; many buildings were renovated or newly constructed. approximately 1000-1200 people were employed at GIPKh (this number includes eight German technicians).
- The Institute was divided into four main functional divisions 3. /see Enclosure (C)--Organization Chart/:
  - General Research Laboratories (for chemistry and physics)
  - (b) A Pilot Plant (in which most of the German technicians were employed)
  - 25X1A A Drafting and Design Office (employed about 120 people)
  - (d)

There were also some smaller units which were kept very secret and about which I have no information.

The Plant Control Section contained a large mechanical workwas well supplied with German tools and 25X1A machines. In addition, there were: a large electrical work- 25X1A shop, a glass blowing shop, one installation for the production of compressed air and two boiler houses.

or these were standard instruments, for example: temperature recorders and regulators, quantity measuring instruments, pressure gauges and pressure regulators, density recorders and various instruments used for analyses. These instruments had  $_{25\times1A}$  been seriously damaged in transit to the USSR. They had merely been crated and shipped to Leningrad where they were distributed: somewhat at random. was assigned ten hygrometers, whereas, there were only two or these instruments in the entire Leuna Plant. such instruments and put them to more general uses.
noted, found boxes containing critical

instruments which had never been unpacked.

German standards, were very poorly trained. Slowly, however, they learned their trade and the work proceeded more smoothly. Occasionally, a very vrgently needed instrument could be procured directly from Germany.

Went back to Leuna and brought the desired instrument by plane.) a Soviet off250erA By the middle all the standard instruments used in large A chemical installations were repaired, procured or constructed, and calibrated. By that time, due to the increased demands made on the Institute,

from the original staf. further details on the origin and kinds of instruments used, see Report

SECRET

25X1A

25X1A

25X1A

5.

25X1A

25X1A

25X1A

# SECRET/SECURITY INFORMATION

-3-

#### Laboratory 579

6. This laboratory designed and operated a pilot plant for the synthesis of ethylamines from ammonia and ethyl alcohol. The Soviets planned to use the results of tests conducted in this laboratory in constructing a large chemical plant at Dzerzhinsk (50° 09' N - 27° 56' E). The Soviet personnel at Laboratory 579 included:

Servyelski A chemistry student from Leningrad who directed research. He had previously worked in the SMA

laboratory at Leuna.

Yerchov Chief Technician and Servyelski's deputy.

Gennig Technical Director.

Sklovski Construction Engineer, who was apparently destined to be the constructor in charge of

the Dzerzhinsk chemical plant.

Three German specialists at Laboratory 579 were:

Ing Ernst Otto Directed construction.

Dr Chemistry Georg Peinze ) Worked at Leuna in the production

Dr Chemistry Karl Smeykal ) of amines until that section of the plant had been destroyed by bombing.

7. This laboratory was equipped with standard pressure equipment

This laboratory was equipped with standard pressure equipment brought from Leuna and which was designed for 250 atmospheres. The six contact ovens or reactors were made of N-8 steel. (This is high grade plated steel, very resistant to heat and pressure.) These reactors were more than one meter high and 90 mm in diameter. A sleeve or lining of V-4-A steel, V-2-A steel, or other suitable non-corrosive metal was put into these ovens which could be used under 250 atmospheres at temperatures as high as 500° C. This lining was 40-50 mm in diameter. There were two Hofer high pressure compressors which had been brought from Leuna. The laboratory had also set up two small distillation columns. Soviet safety engineers checked the German pressure tests before permitting operation of any high pressure equipment. Originally the Soviets had estimated that the installation and preliminary testing would take three months. Lack of proper materials and poor training of the Soviet personnel caused so many delays that almost two years had passed before this installation began to function in the spring of 1948. There were frequent discussions concerning these delays between a German engineer, Ernst Otto, and a Soviet engineer, Sklovski. As they spoke in German, 1948 Skioveri told outo that the large plant being erected at Early in Dzherzhinsk was about one year behind schedule. Sklovski complained in particular about some special pumps made at Dzherzhinsk which had failed to pass the tests; he was also annoyed because the foundations for these pumps had been made in a faulty manner--and that because of this failure, the entire installation was being held up.

SECRET

25X1A

the processes at Laboratory 579 with accuracy. Peinze and Smeykal filled the ovens or reactors with the catalyst and then added the reactants which were liquids or gases. This was done in a room that was closely guarded. At first, experiments were made with pressures ranging between 50-250 atmospheres. Most of the work was done at 50 atmospheres. Monoethyl amine, di-ethyl amine and tri-ethyl amine were produced by reacting ethyl alcohol and ammonia over kaolin and water glass dehydration catalysts. The amount of liquid poured through the reactors was about 100 cubic centimeters per hour. The first tests were made with contact catalysts brought from Leuna. The later tests, made with Soviet catalysts, were very unsatisfactory. Many of the tests had to be repeated a number of times because of mistakes made by the poorly trained Soviet workers. In the beginning, this led to endless quarrels and disputes between the people engaged in research. I believe that the tri-ethyl amine was the most satisfactory as a rocket fuel. Soviet engineer Gennig, who at first worked in this laboratory, was later assigned to work in the rocket fuel testing installation.

# Laboratory 604 - Amine Fuels

This second research laboratory for amine fuels was entirely in the hands of the Soviets. The personnel included:

Servyelski Research Director . Zarichev Constructors and Khakelson Technicians Albitski Krichevkov

Kolobev Measuring Instruments

The equipment in this laboratory consisted primarily of pumps, reactors and salt removers. Some of these had been built by Ernst Otto. The processes used were different from those in Laboratory 579. The reaction was started in a coil, 30-40 meters long and which had an inner diameter of about 20 mm. This process had many technical drawbacks and repairs were very frequent. Approximately 100-200 liters of the solution went through the pipes daily. The pipes rarely lasted more than a few weeks and often only a few days, before they had to be repaired due to corrosion. Salt, deposited in the tubes, had to be removed with a special apparatus which was more often in repair than in use. I only set up the measuring instruments in this laboratory -- the instruments were serviced, after having been set up, by a Soviet, Kolobev.

## Laboratory 575 - Nitration

25X1A

the names of the following personnel employed in Laboratory 575:

> Soviets: Research Director

Kvosiev Chemistry student and technician Zaritchev Constructor and technician

Germans: Dr Gerhardt Geiseler

Dipl Ing Ernst Otto

SECRET

Approved For Release 2001/08/02: CIA-RDP81-01028R000100100015-3

For safety reasons, this laboratory had been built in a concrete room. The main equipment consisted of: containers of material, pre-heaters, reactors and coolers. The work was divided into two separate operations -- one for liquids and one for gases. After a few explosions and unsuccessful experiments, the liquid phase nitration worked very well. The gaseous process was used in the nitration of methane with nitric acid and operated at a pressure of three atmospheres and at temperatures up to 430° C. The reaction took place in a pipe which was about five meters long and about 4 mm in diameter. After a few hours of operation, the reaction tubes were so heavily corroded that work had to be suspended. In order to decrease this heavy corrosion, all available materials for the reaction chambers were tried, but without success. a gold-plated reactor, constructed by otto, was set up but I do not know the results. Most of the nitro-methane produced was tested and then used as a solvent in the laboratory. In addition to the corrosion element, the uniform addition of acid caused great difficulty; I heard that Otto was planning some new apparatus to solve this problem. Dr Geiseler told me that this two-stage process of nitration was based on American technical literature.

Laboratory 601

25X1A

11. Gofman was the Soviet technician in charge of this installation, which consisted of four senarate sections

I know that the many acid laboratories, which existed in the Institute before our arrival, were torn down and replaced by these new installations in 1949-50. Judging from the Soviet technicians were operating with some very corrosive products which may have been hydrofluoric acid, and the end product may have been freon.

12.

of Laboratory 601.

the final product may have the Soviets mention that name, which was here was a supply of freon in the workshop of the Flant Manager and this supply was brought in from the vicinity

25X1A

25X1A

25X1A

25X1A

25X1A

25X1A

25X1A

There were three containers, A, B, and C, and four receivers, D. All containers and receivers had a capacity of about 40 liters each. I believe that all of these containers were made of V-2-A material and that container B, a reactor, was lined with lead. A liquid from container A, heated electrically, was fed by gravity into reactor B. Another liquid, in steel container C, was vaporized by heating with water and steam. The vapors were passed into reactor B which was maintained at about 200° C by an electric heating coil. Reactor B was equipped with a 250° C thermometer and a metal float with an iron staff, about one meter long, attached. The level of the liquid in the reactor was indicated by a meter which recorded changes in a magnetic field caused by the movement of the iron staff into and out of that field. The reaction product distilled from the top of reactor B, and the vapors were condensed by passing them downward through a coil cooled to -27° C and collected in receiver D. When the reaction did not proceed properly, a white crystalline product formed in reactor B, and in the line between A and B, but never in the line between C and B. This deposit had to be melted with a blowtorch applied to the outside of reactor B. Sometimes the line between A and B was disconnected at B and the solid producted removed from

25X1A 25X1A

this white crystalline product was, what the reactants and the final product were. I believe that cylinder C may have contained hydrofluoric acid or fluorine. The pressure gauge over this cylinder was rapidly corroded and the outside of the cover glass to the gauge was etched white in about two days and had to be discarded.

Let soon 25X1A became cloudy and had to be discarded also. Rubbing the plexiglass with oil prolonged its usefulness slightly. The thermometer, used for holding the condenser coil at 27° C, was tested in freon. Chemical handbooks give a boiling point of -28° C for difluorodichloromethane (freon). The corrosion in nearly all the equipment used in this process was very rapid. Valves and lines had to be repaired or replaced almost daily. Once a drop of liquid fell from an overhead pipe onto a worker's neck and the burn was so serious that it took six weeks to heal.

#### Other Installations of the GIPKh Institute

- 13. There were three other installations at the Institute about which I know very little; I can give the following information about them:
  - (a) Rocket Fuel Testing Installation:

This unit was entirely Soviet-operated. Spak directed research; his assistants were engineer Gennig and some Air Force and Navy officers. Approximately 25x1A people were employed in this project which was housed in a concrete bunker on the banks of the Neva River.

particularly a pressure recorder, built with a scale 0-40 kg per sq cm and a chart speed of five seconds per rotation. A Siemens oscillograph was set up there in 1949. The tests which were conducted produced a swishing noise, like steam escaping through a valve, and varied in intensity. In some ways it sounded like an ordinary rocket used for fireworks. The noise lasted approximately four-five seconds. Sometimes, over half a dozen of these noises per hour could be heard for eight hours; on other days, there was no noise whatsoever.

(b) Acetylene Laboratory:

This unit was under the direction of Soviet technication Ryabkov, but he worked there only part of the time.

Dr Dieter von der Horst, a chemist, was the only German working there.

was a very small laboratory in which lew measuring instruments were used.

generator, a distillation column and a compressor were located in this laboratory.

(c) Secret Project:

This installation was classified top secret. Only one man, Soviet worker Pitushin from Plant Control, was admitted into this project, which I believe was the catalyst section. I know nothing further about this project.

-7-

25X1A

## Security at the Institute

14.

women. A simple pass was sufficient to gain admission. At the beginning of then the various laboratories were finally ready to begin more intensive research, supervision became very strict. Our passes were collected at the entrance and checked against a list of the personnel working in the Institute.

The female guards were replaced by men in civilian clothes. We could easily see, however, that they all wore the same kind of black suits and had pistols under their coats. We were not permitted to carry any sort of papers out of the gate. All Soviet personnel who had been prisoners of war in Germany were withdrawn. I was told that they were all given menial jobs in less critical places. A high barbed wire fence was erected on the side opposite the Neva River. All of these security measures were,

25X1A

25X1A

25X1A

-end-

ENCLOSURE (A) Overlay of USAF Target Complex Chart of Leningrad Showing GIPKh and KhIMGAS Institutes


strictly enforced.

- ENCLOSURE (B) GIPKh Institute Part 1 Layout Part 2 Legend
- ENCLOSURE (C) Organization Chart of German and Soviet Personnel Employed at GIPKh
- ENCLOSURE (D) Sketch of a Chemical Process Rerformed in Laboratory 601 of the GIPKh Institute

25X1A

SECRET/SECURITY INFORMATION

ENCL. A

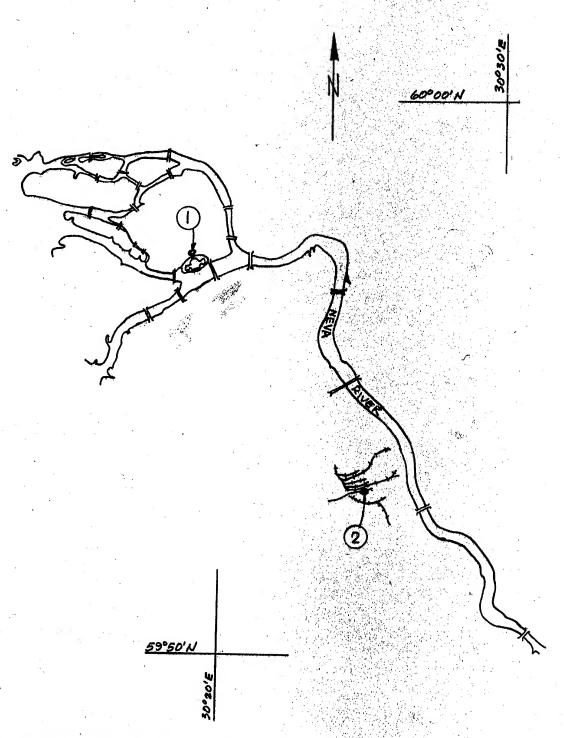

OVERLAY OF USAF TARGET COMPLEX CHART - SERIES 100
LENINGRAD

ENCLOSURE (A) Point 1 - GIPKh Institute Point 2 - KhIMGAS Institute


25X1A

ENCLOSURE (B)
 Part 1 - Layout of GIPKh Institute

Point I	Living Quarters for Soviet personnel
Point 2	Dispensary
Point 3	Main Building, containing Soviet laboratories
Point 4	Administration Building
Point 5	Boiler Building I
Point 6	Technical Installation
Point 7	Storage Building
Point 8	"Secret" Technical Installation
Point 9	Boiler Building II
Point 10	Laboratories of German and Soviet scientists
Point 11	Workshops (Electrical and Mechanical)
Point 12	Rocket Fuel Testing Installation
Point 13	Storage Building for electrical equipment
Point 14	Mess Hall
Point 15	Plant Control and Management Department
Point 16	Engineer Drafting and Designing Department

# ENCLOSURE (B) Part 2 - Legend,

Accompanying Part 1, ENCLOSURE (B) - Layout of GIPKh Institute

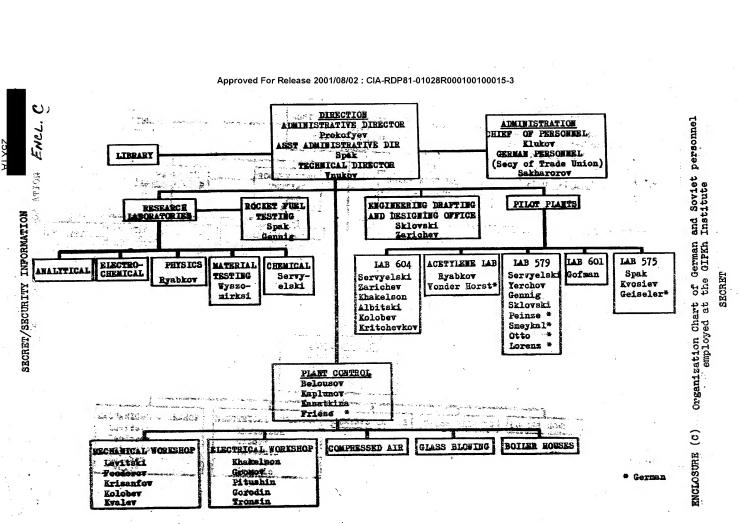

ENCL. D

